

CELLPHONESANDBOX

Manual 01 - Battery Cover

Install a new battery cover on the iPhone 4 CDMA.

Written By: James Linder





TOOLS:


- [Technician Starter Package](#) (1)

Step 1 — Removal 1 - Battery Cover



- Before disassembling the iPhone, thoroughly wash and dry your hands.
- Make sure handset is powered off.
- Place the handset in your non-dominant hand. Remove two Pentalobe screws near charging port with special 5-point Pentalobe screwdriver. Place screws in SLOT 1.
- Gently slide battery cover upwards. Pull battery cover away from iPhone. Place battery cover in ZONE I.

Step 2 — Replacement 1 - Battery Cover

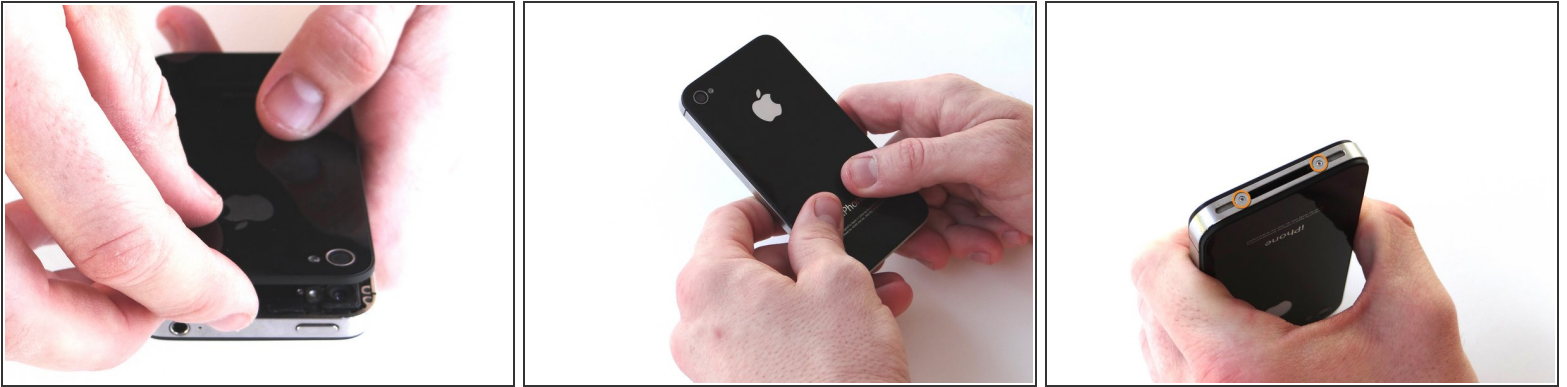

- Grab battery cover from ZONE I.
- Place battery cover 2 mm above the bottom of the iPhone and slide it down to lock it in place.
- Secure the battery cover with two Pentalobe screws from SLOT 1.

Step 3

This document contains information confidential and proprietary to Red Roundtable Inc. dba Cell Phone Sandbox, referred to herein as 'Red Roundtable'. The information contained in this document is intended for the sole confidential use of the designated recipients and contains confidential information. The information may not be used, disclosed or reproduced without the prior written authorization of Red Roundtable.

If you have received this document in error, any review, dissemination, distribution or copying of this information is strictly prohibited. If you have received this document in error, please notify us immediately by email (support@cellphonesandbox.com) and return the original document to us by mail or if electronic, reroute back to the sender.

● Legal Disclaimer